GENERAL NOTES:

1. ALL EXTERIOR PACKAGING MATERIAL APPLIED TO PLANTS SHALL BE REMOVED AFTER THE PLANT IS LOCATED IN THE PIT EXCAVATION. CUT AND REMOVE TWINE, BURLAP OR WIRE BASKETS FROM THE TOP TWO-THIRDS OF THE ROOT BALL.
2. PLANT MALUS SPECIES (DECIDUOUS APPLE TREES OR SHRUBS) DEEP ENOUGH IN PIT TO COVER THE GRAFT TO PREVENT SPROUTING FROM THE ROOT STOCK.

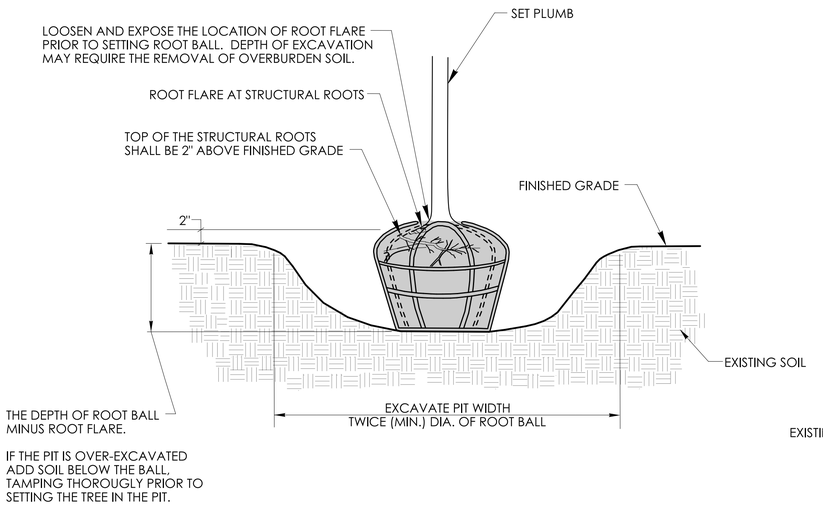

PIT EXCAVATION AND SETTING OF PLANTING

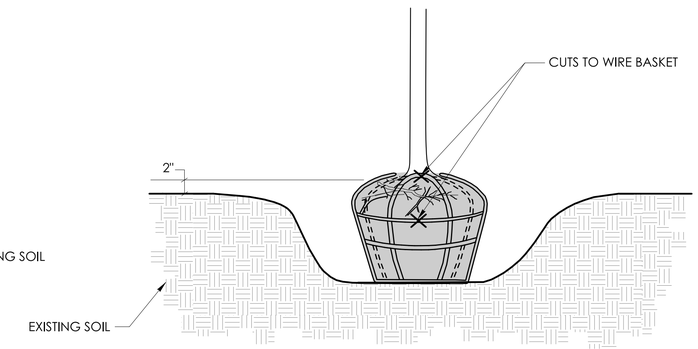

WIRE BASKET REMOVAL

NOTE: IF WIRE BASKETS ARE USED, THE CONTRACTOR SHALL CUT ALL OF THE HORIZONTAL WIRES IN THE TOP ⅔ OF THE ROOT BALL AND BEND DOWN OR REMOVE THE TOP ⅓ OF THE WIRE BASKET

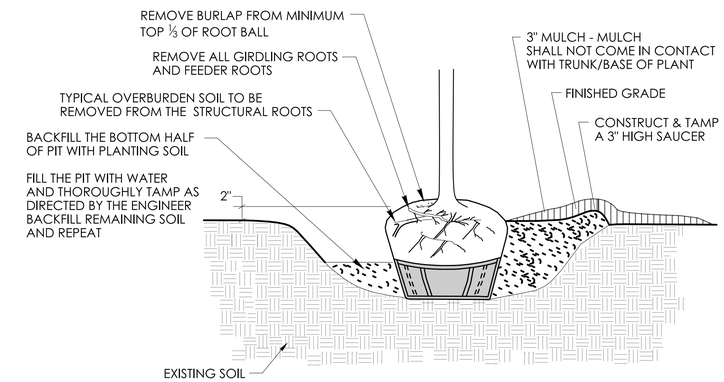

BACKFILL AND MULCH FOR PLANTING

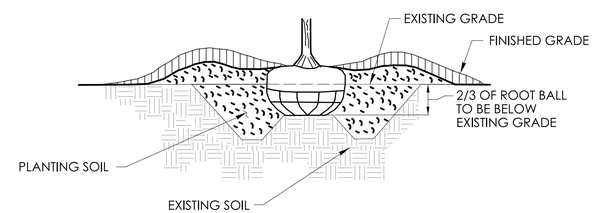

HEAVY CLAY PLANTINGS

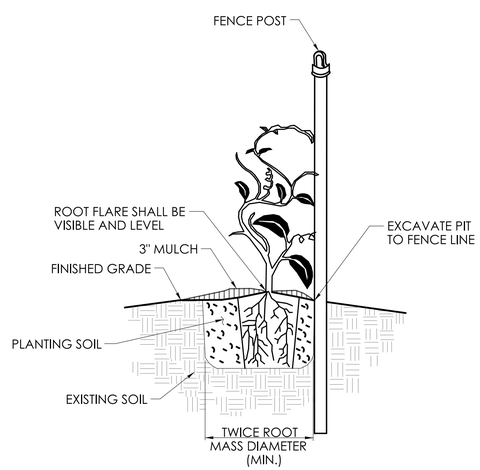

VINE PLANTING

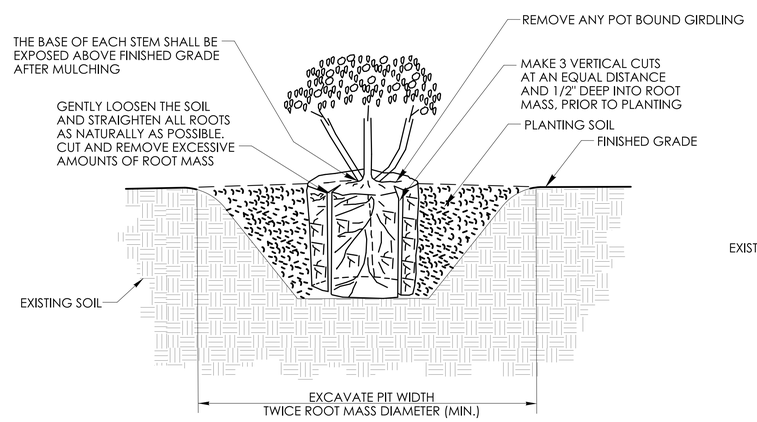

CONTAINER GROWN PLANTING

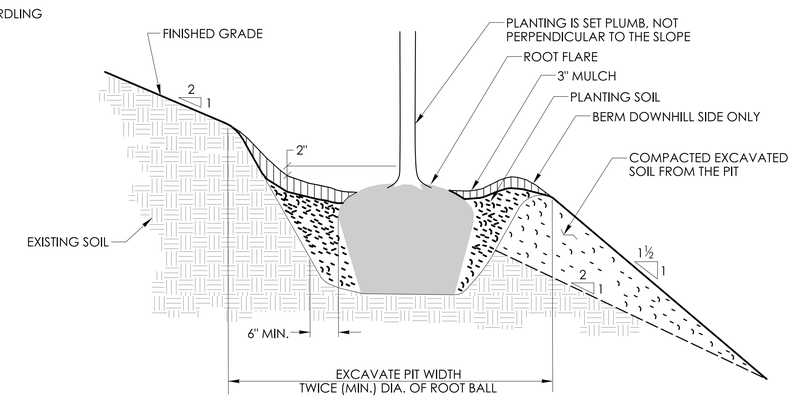

SLOPE PLANTING

	NOT TO SCALE	SIGNATURE BLOCK: OFFICE OF ENGINEERING 2800 BERLIN TURNPIKE NEWINGTON, CT 06111	SUBMITTED BY: Digitally signed by Leo Fontaine, P.E. Date: 2022.09.27 15:19:40-04'00'	APPROVED BY: Digitally signed by Calabrese, Michael Date: 2022.11.08 09:40:50-05'00'	STATE OF CONNECTICUT DEPARTMENT OF TRANSPORTATION	CTDOT STANDARD SHEET	STANDARD SHEET TITLE: LANDSCAPE PLANTING	STANDARD SHEET NO.: HW- 949_01a

PLOTTED DATE: 9/22/2022